


CARGO—INTEGRAL EYE

WIDTH	PART NO.	EYE WIDTH	EYE LENGTH	MIN. SLING LENGTH	*RATED CAPACITY (lbs)	
					BASKET HITCH	
6"	CIE2-X63	1½"	12"	3'	13200	
	CIE2-X93	1½"	12"	3'	18600	
	CIE4-X63	1½"	12"	4'	26400	
	CIE4-X93	1½"	12"	4'	37200	
8"	CIE2-X64	1½"	12"	4'	17600	
	CIE2-X94	1½"	12"	4'	24800	
	CIE4-X64	1½"	12"	4'	32800	
	CIE4-X94	1½"	12"	4'	44000	
12"	CIE2-X66	2"	14"	5'	26400	
	CIE2-X96	2"	14"	5'	37200	
	CIE4-X66	2"	20"	5'	49200	
	CIE4-X96	2"	20"	5'	66000	
16"	CIE2-X98	3"	18"	5'	44000	
	CIE4-X98	3"	24"	6'	88000	
18"	CIE3-X66	2"	24"	8'	26400	
	CIE3-X96	2"	24"	8'	37200	
	CIE6-X66	3"	30"	8'	49200	
	CIE6-X96	3"	30"	8'	66000	
24"	CIE3-X98	3"	30"	10'	44000	
	CIE2-X912	5"	30"	10'	66000	
	CIE6-X98	3"	36"	10'	88000	
	CIE4-X912	6"	36"	10'	132000	

⚠ WARNING DO NOT EXCEED RATED CAPACITY

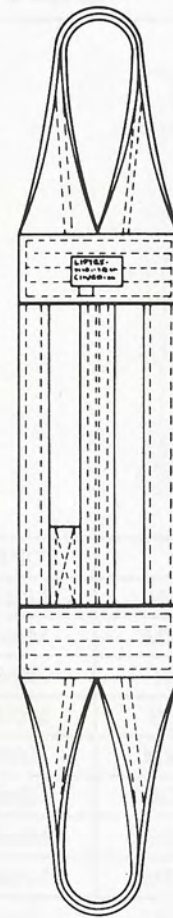

CIE

Cargo-Integral Eye (CIE)

Wide slings (6 to 24 inches or wider) for basket hitch only. For applications where a wide sling is needed for load stability, or protection of soft surfaces. Spreads the load over a greater surface area.

Wider widths available on request.


Available in Nylon or Polyester Webbing.

For Polyester Webbing add the letter "P" to the Part No. (Example—CIE2-X63P)

CARGO—BRIDLE EYE

WIDTH	PART NO.	EYE WIDTH	EYE LENGTH	MIN. SLING LENGTH	*RATED CAPACITY (lbs)	
					BASKET HITCH	
6"	CBE-680	1"	6"	3'	8000	
8"	CBE-880	1"	6"	3'	8000	
12"	CBE-1280	1"	12"	4'	8000	
16"	CBE-16100	1"	12"	4'	10000	
18"	CBE-18100	1"	12"	4'	10000	
24"	CBE-24100	1"	18"	5'	10000	

⚠ WARNING DO NOT EXCEED RATED CAPACITY

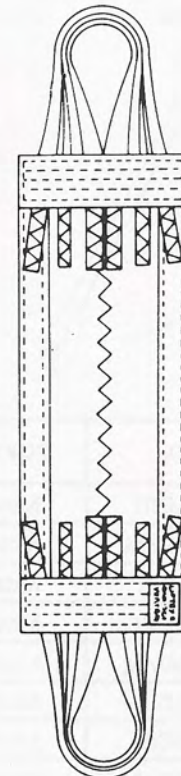

CBE

Cargo-Bridle Eye (CBE)

Same purpose and use as CIE. More economical when a wide sling is needed but the load is less. Eyes are smaller (1" width) to fit small hoist hooks.

Wider widths available on request.

Available in Nylon or Polyester Webbing.

For Polyester Webbing add the letter "P" to the Part No. (Example—