


SAFE-LINE CLAMPS

For wire rope 1/8" thru 3/4"

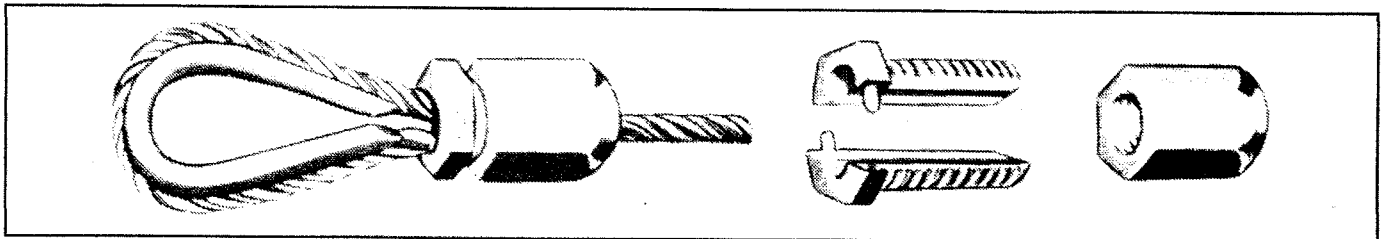

No more pressure! The Safe-Line Wire Rope Clamp is distributed by Esmet, Inc. These durable fittings are ideal for field installations that require quick, easily thimble rope terminations, with the reliability that wire rope clips cannot provide. Designed only for 6 x 19 IWRC or 7 x 19 right regular-lay wire rope, the cadmium plated Safe-Line Clamp assembly includes a two-piece plug and cold-finish-bar steel socket.

The finished assembly provides a neat, clean profile (similar to a swage fitting) with no sharp edges or loose ends to snag. And they hold! The Safe-Line Clamp is rated with an efficiency of over 90% of rated wire rope strength. The clamp meets or exceeds all requirements for Military Standard MS-16843 and conforms to Federal Spec. FS-C-450. They are warranted for one year.

Rope Size	Catalog No.	Weight Ounces	Torque to Assemble
1/8	AC-1012Y	2	35
3/16	AC-1018Y	4	80
1/4	AC-1025Y	5	145
5/16	AC-1031Y	10	225
3/8	AC-1037Y	13	325
1/2	AC-1050Y	32	575
5/8	AC-1062Y	48	900
3/4	AC-1075Y	84	1300

Wire Rope Clips

Size	Min. Clips Required	Amt. Wire Rope to Turn Back	Torque in Pounds Foot	Approx. Weight in Pounds	Malleable Wire Rope Clips						
					A	B	C	D	E	F	G
1/16"	3	4"	2	.03	.15	.65	.45	.38	.38	.45	.69
1/8"	3	4.3/4"	3	.04	.18	.81	.50	.50	.50	.56	.94
3/16"	3	5.1/2"	4.5	.063	.25	.94	.56	.56	.56	.63	1.06
1/4"	3	7"	15	.13	.31	1.19	.75	.75	.69	.75	1.31
5/16"	3	7.3/4"	15	.15	.31	1.31	.84	.75	.75	.75	1.44
3/8"	3	9.1/2"	30	.21	.38	1.63	1.00	.88	.84	.88	1.63
7/16"	4	10.1/4"	40	.37	.44	2.00	1.19	1.06	1.00	1.06	1.88
1/2"	4	15.1/4"	45	.37	.44	2.00	1.19	1.06	1.00	1.06	1.88
9/16"	4	16"	50	.59	.50	2.31	1.38	1.25	1.25	1.28	2.09
5/8"	4	16"	75	.59	.50	2.31	1.38	1.25	1.25	1.28	2.09
3/4"	5	22.1/4"	75	.84	.56	2.56	1.56	1.31	1.44	1.56	2.38
7/8"	5	23.1/2"	130	1.25	.63	3.06	1.81	1.63	1.75	1.81	2.88
1"	6	31"	130	1.66	.63	3.44	2.00	1.88	2.06	2.00	3.00
1.1/8"	7	39"	200	2.43	.75	4.00	2.75	2.00	2.19	2.06	3.38

Malleable Wire Rope Clips

Galvanized

