

LOCKING COUPLERS


Aluminum, Brass, Ductile Iron, or Stainless Steel. (Specify when ordering.)




**Part BSL
Coupler X
Male NPT**
20 BSL
30 BSL
40 BSL



**Part CSL
Coupler X
Hose Shank**
10 CSL
12 CSL
15 CSL
20 CSL
30 CSL
40 CSL

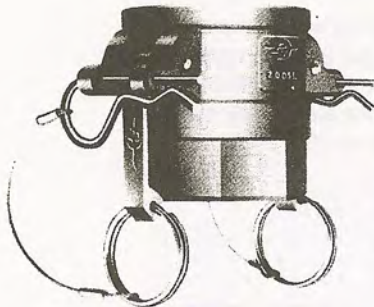

**Part DSL
Coupler X
Female NPT**
10 DSL
12 DSL
15 DSL
20 DSL
25 DSL
30 DSL
40 DSL

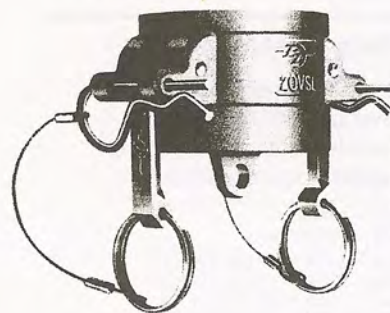

**Part VSL
Coupler,
Dust Cap**
20 VSL
25 VSL
30 VSL
40 VSL

PASSIVE LOCK COUPLERS


Aluminum, Brass, or Stainless Steel. (Specify when ordering.)




**Part B
Coupler X
Male NPT**
12BSL2
15BSL2
20BSL2
25BSL2
30BSL2
40BSL2
50BSL2



**Part C
Coupler X
Hose Shank**
12CSL2
15CSL2
20CSL2
25CSL2
30CSL2
40CSL2
50CSL2



**Part D
Coupler X
Female NPT**
12DSL2
15DSL2
20DSL2
25DSL2
30DSL2
40DSL2
50DSL2




**Part V
Coupler,
Dust Cap**
12VSL2
15VSL2
20VSL2
25VSL2
30VSL2
40VSL2
50VSL2

PART A - Adapter



Adapter X Female NPT

PART B - Coupler



**Part CXC
Coupler X
Coupler**
20CX20CSL2
30CX20CSL2
30CX30CSL2
40CX30CSL2
50CX50CSL2



Coupler X Male NPT

PART E - Adapter



Adapter X Hose Shank

PART F - Adapter



Adapter X Male NPT

Cam And Groove

Operation of Cam & Groove. To connect simply slide the adapter into the coupler and with normal hand pressure, press the cam arms down. • To uncouple lift the cam arms and remove the adapter.

PART C - Coupler



Coupler X Hose Shank

PART D - Coupler



Coupler X Female NPT

Size

- 1/2"
- 3/4"
- 1"
- 1 1/4"
- 1 1/2"
- 2"
- 2 1/2"
- 3"
- 4"
- 6"