



### ■ Rescuer-25, 35, -50

The MSEC Rescuer is a shock-absorbing, fall arrest, retracting lifeline device that, when used along with a complete system, protects a worker who is in any position where a fall may occur. In the event of a fall, a centrifugal mechanism is activated and automatically arrests the fall. These retracting lifelines feature special heat-treated, cast-aluminum housing for exceptional durability. Sealed ball bearings allow for a smooth-flowing cable extension and retraction to maintain comfort and mobility even when maximum cable length is extended. The cable is constructed of stainless or galvanized steel and the housing is sealed for maximum weather resistance.

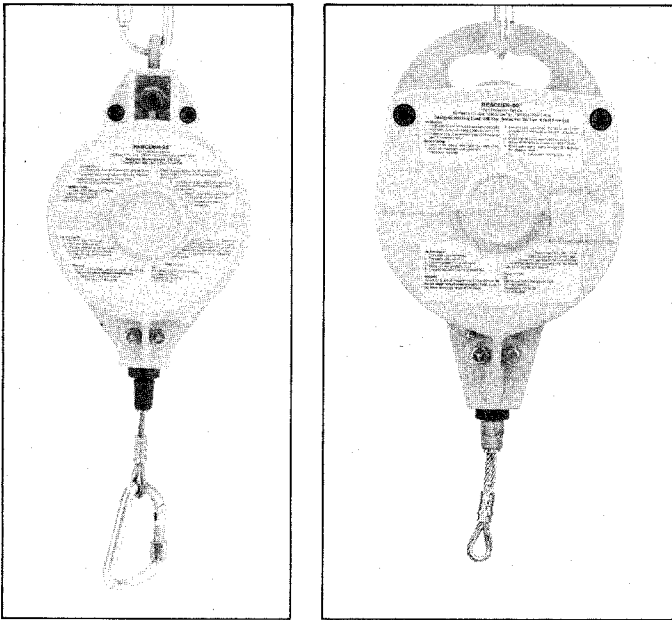

### ■ RescueWinch-50

The RescueWinch-50 combines the function of a 50-foot retracting lifeline and a built-in rescue retrieval system. NOTE: See confined space brochure for further details.

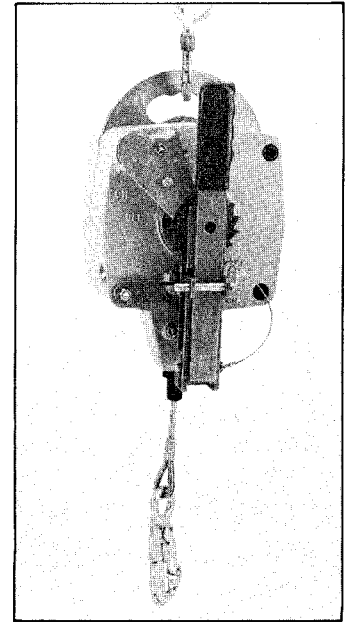

### SPECIFICATIONS

RETRACTING LIFELINES					
Trade Name: Model No.:	Rescuer RLL25	Rescuer RLL35	Rescuer RLL50	RescueWinch-50 RW50	
Approx. Cable Length	25	35	50	50	Feet
Cable Diameter	3/16	3/16	3/16	3/16	Inch
Minimum Cable Breaking Strength	3000	3000	3000	3000	Pounds
Max. Work Load	300	300	300	300	Pounds
Cable Lock Speed	4-5	4-5	4-5	4-5	Ft./Sec.
Weight	20	28	29	42	Pounds
Retrieval Capabilities	N/A	N/A	N/A	Yes	

- A retracting lifeline should never be used where there is a possibility of a swing fall.
- Customer is responsible for providing an anchor which can withstand a 5400-pound load.